


WEB SPEED DOME CAMERA

DOH-240SiW/eW

**324X ZOOM, 550TVL
TDN, 0.00005Lux**

Features

- 27X Optical Zoom Lens Integrated Web Speed Dome Camera
- Day & Night, Minimum Illumination 0.00005Lux
- MPEG4 Compression, Multi-Streaming
- Dynamic IP supported
- High Resolution Image can be remotely sent (704(H) X 480(V))
- User Friendly and Easy Surveillance, Monitoring, Searching, Control from Local or Remote Area

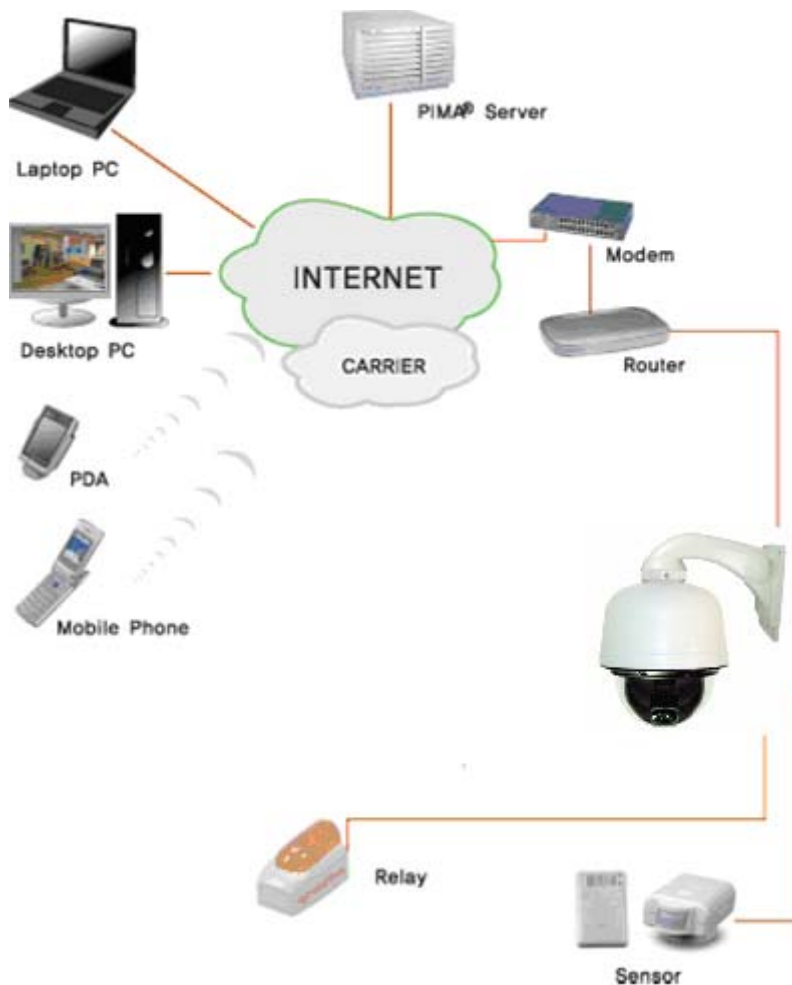

DOH-240Sew



DOH-240Siw

MODEL	DOH-240Siw / DOH-240Sew	
Signal system	NTSC	PAL
Image sensor	1/4" Type Sony HAD CCD	
Number of effective pixels	768(H)X494(V) 380K	752(H)X582(V) 440K
Horizontal resolution	More than 550 TV lines	More than 550 TV lines
Lens	27x Optical zoom, F 1.6(Wide) - 3.8(Tele), f =3.5 – 94.5mm	
Minimum illumination	0.5 Lux. (30 IRE, AGC34dB), 0.1Lux(Day&Night),0.00005Lux(DSS)	
Luminance S/N ratio	More than 49dB (AGC OFF)	
Focus mode	Auto/manual/oneshot	
Back light	Off / Low / Middle / High	
AGC Control	Auto/ 8 – 38 dB selectable	
Shutter speed control	1/60 – 1/10,000 sec 28 steps	1/50 – 1/10,000 sec 28 steps
Flickerless set	Off/On(1/100 sec shutter set)	Off/On(1/120 sec shutter set)
Sharpness control	Level 0 – 15	
Pan/Tilt speed	Max Pan : 180°/sec / Tilt 90°/sec	
Vertical Tilt	+2° - 90°	
Home position	On / Off	
Preset point	250 Presets	
Video Output	Channel 1 ch	
	Compression MPEG4 & JPEG Selectable	
	Resolution 704 x 480	
	Frame rate 30 fps	
Audio (Additional Option)	Bi-directional	
	Compression G.723	
View Program	PC, PDA, Mobile Phone	
qw	Global/Private/Static/ Dynamic IP	
	DDNS Support	
	Encryption (ID/Password/Image)	
	Interface (10/100Mbps)	
Recording	Manual / Schedule / motion Detection / Sensor Event	
Event & Alarm	Sensor Trigger /Motion Detection / Alarm Notification	
Connectors	RJ 45, Power supply	
API Support	Available	
Environment	DOH-240SiW(Indoor) / DOH-240SeW(Outdoor)	
Operating temperature	DOH-240SiW (- 10° C to 50°) DOH-240SeW(- 40° C to 50°)	
Weight	About 3.2Kg (DOH-240Siw)/ 5.2Kg (DOH-240Sew)((Without adaptor)	
Material	ABS(Si), Aluminum(Se), 6.6 inch Bubble (Poly-carbonate)	
Demension	240Siw (224 (H) X 189 (D) mm), 240Sew (271 (H) X 217 (D) mm),	
Color	Back box (ivory), Clear Bubble	
Input Voltage	18~30 VAC, AC24V (nominal), Fuse 1.5A	
Power Consumption	25W (Max)	