


# H.264 IP 1.3 MEGA PIXEL CMOS COMPACT CAMERA

Ref: IP-MP95/W - IP-MP95

## Feature

- 1.3 Mega pixel (1280 x 1024) progressive scan CMOS sensor
- H.264/MPEG-4/JPEG triple streams simultaneously
- Compact size & easy operation
- 2-way audio
- Mobile view support
- PoE support

IP cam

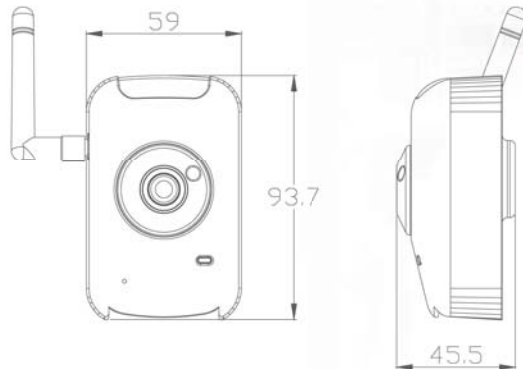

Server	Network Compression	Triple streams: H.264/MPEG-4/JPEG
	Pixel (H x V)	1280x1024, 1280x960, 800x592, 640x480, 320x240, 176x144
	Traffic Control	32/48/64/96/128/196/256/320/384/448/512/576/640/704/768Kbps 1/1.5/2/2.5/3/3.5/4/6/8Mbps
	Max. Frame Rate	Max. 30FPS (640x480, 320x240, 176x144), 15FPS (1280x1024, 1280x960, 800x592)
	Safety	User-ID and password
	Protocol	TCP, UDP, IP, HTTP, FTP, SMTP, DHCP, PPPoE, DNS, DDNS, NTP, UPnP, UPnP forwarding, RTSP
	Number of User	Max. 10 connections for single video
	Alerting	SMTP, FTP, HTTP
	Pre / Post Alarm	Pre (0,1,2,3,4,5), post (0,1,2,3,4,5,10) seconds
	Release for alarm	Motion detection, I/O or schedule
Network Camera	Image Pick-up Device	1/4" Progressive Scan CMOS sensor approximately 1.3 mega pixel
	BLC	Auto (ON/OFF)
	Electronic Shutter	1/50 (1/60) ~ 1/100,000 second
	Min Illum.	1.5 - 100.000 Lux (in night color mode 0.5-100.000 Lux)
Audio	Lens	4mm lens
	Audio Communication	2-way-halfduplex
	Audio Compression	ADPCM 32Kbps
	Frequency	300 Hz - 3.4KHz
	Audio In	Microphone built in
Terminal	Audio Out	3.5mm, line out for external speaker
	Network Interface	Ethernet(10Base-T/100Base-Tx)
General	Operation Voltage	LAN: 12V DC (max. 3W), WiFi: 12V DC (max. 4W)
	Dimen./Weight	93.7(H)x59(W)x45.5(D)mm / @180g / 12pcs per carton
	Operation Temp.	-10°C ~ +45°C, relative moisture 20%-90%



## Order Reference

IP-MP95/W: WiFi

AXETECH Group Distributor Official For BENELUX    Tél. + 32 2 332 01 11    Fax. + 32 2 332 03 11    info@axetech.be