

EXTENSION BAY

DME-6432

64 CAMERA INPUT


Features

- This Unit can be extended up to 3 units to one another
- Max. 255 Cameras Input, 32 Monitors Output
- With exclusive Processing chip for Video Signal, the best quality video signal can be displayed
- Easy assembly and disassembly by using exclusive connector cable
- Address of each unit (DME-6432) can be set at user's option.
- Color, B/W can be processed


Picture




Dimensions

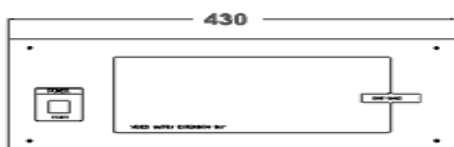

FRONT

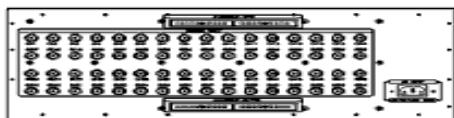

BACK

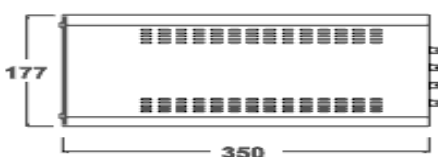

SIDE

(Unit:mm)

Specifications

MODEL	DME-6432
System	64 Camera Input(NTSC/PAL)
	Extension Output 32 Channel
	RS-232 TTL Interface
	Alarm Interface
Function	Network Interface
	64 Camera Input Control
	Anti-Noise synchronization creates smooth conversion of video arising when converting the video
Camera Input	64EA(BNC Connector)
Extension In/ Output	40Pin Connector 2EA
Communication	Camera Control-38400,N,8,1(TTL Level)
Power Consumption	Power Supply 190~240V, 50/60Hz, Built-in 350 W Max. Consumption of electric power - 50W
Operating Temp	0°C ~ +40°C
Weight	Approx 10Kg
Dimensions	430(W) x 177 (H) x 350 (D)mm