

# MAIN MATRIX CPU

## DMX-25632

**Max.256 CAMERA INPUT  
32 MONITOR OUT**


### Features

- 64 Camera (Extended up to 256 Cameras), 32 Monitors can be controlled
- 16 Characters Korean, 32 English letters supported
- Up to 16 pcs of Video Card (DVC-6432) can be inserted (2 Video Outputs for each DVC-6432)
- 3 Video Input Extension Bay Unit (DME-6432) can be connected, Max. 256 Cameras controlled
- Built-in I/D, Time, Generator per each Video Card (DVC-6432)
- Anti-Noise synchronization creates smooth conversion of video arising when converting the video
- Can be operated by DCK-255, DCK-500 and up to 8 sub-keyboards can be connected
- Built-in Alarm Interlocking device (Max. 512 sensors can be input when using DAR-080, DAR-241)
- Direct connection with PC or DVR with built-in RS-232 Port (DGM-2002 can be connected)

### Picture



### Dimensions

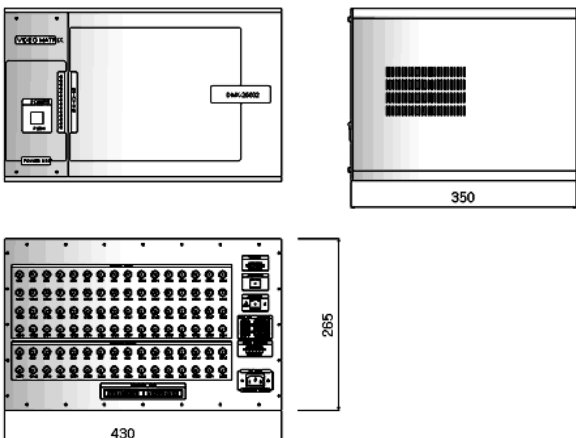

### Specifications

MODEL	DMX-25632
System	I/O card slot 16 EA Keyboard interface Rs -232 interface CCTV receiver control interface Alarm interface
Function	256 by 32 video matrix control 256 CCTV receiver control 8 Sub keyboard control Protecting from noise
Display	Korean 16characters, 32English letters Data/Time Display Alarm,Status Display
Camera Input	64EA(BNC Connector)
Monitor Output	32EA(BNC Connector)
Data Backup	Data/Time Display
Communication	CCTV Receiver-9600,N,8,1 Sub Keyboard-9000,N,8,1 Rs-232C-9600,N,8,1 ARU-1200,E,8,1
Operating Temp	0°C ~ +40°C
Weight	Approx. 3.5Kg
Dimensions	430(W) x 265 (H) x 350 (D)mm